





STRAIGHT

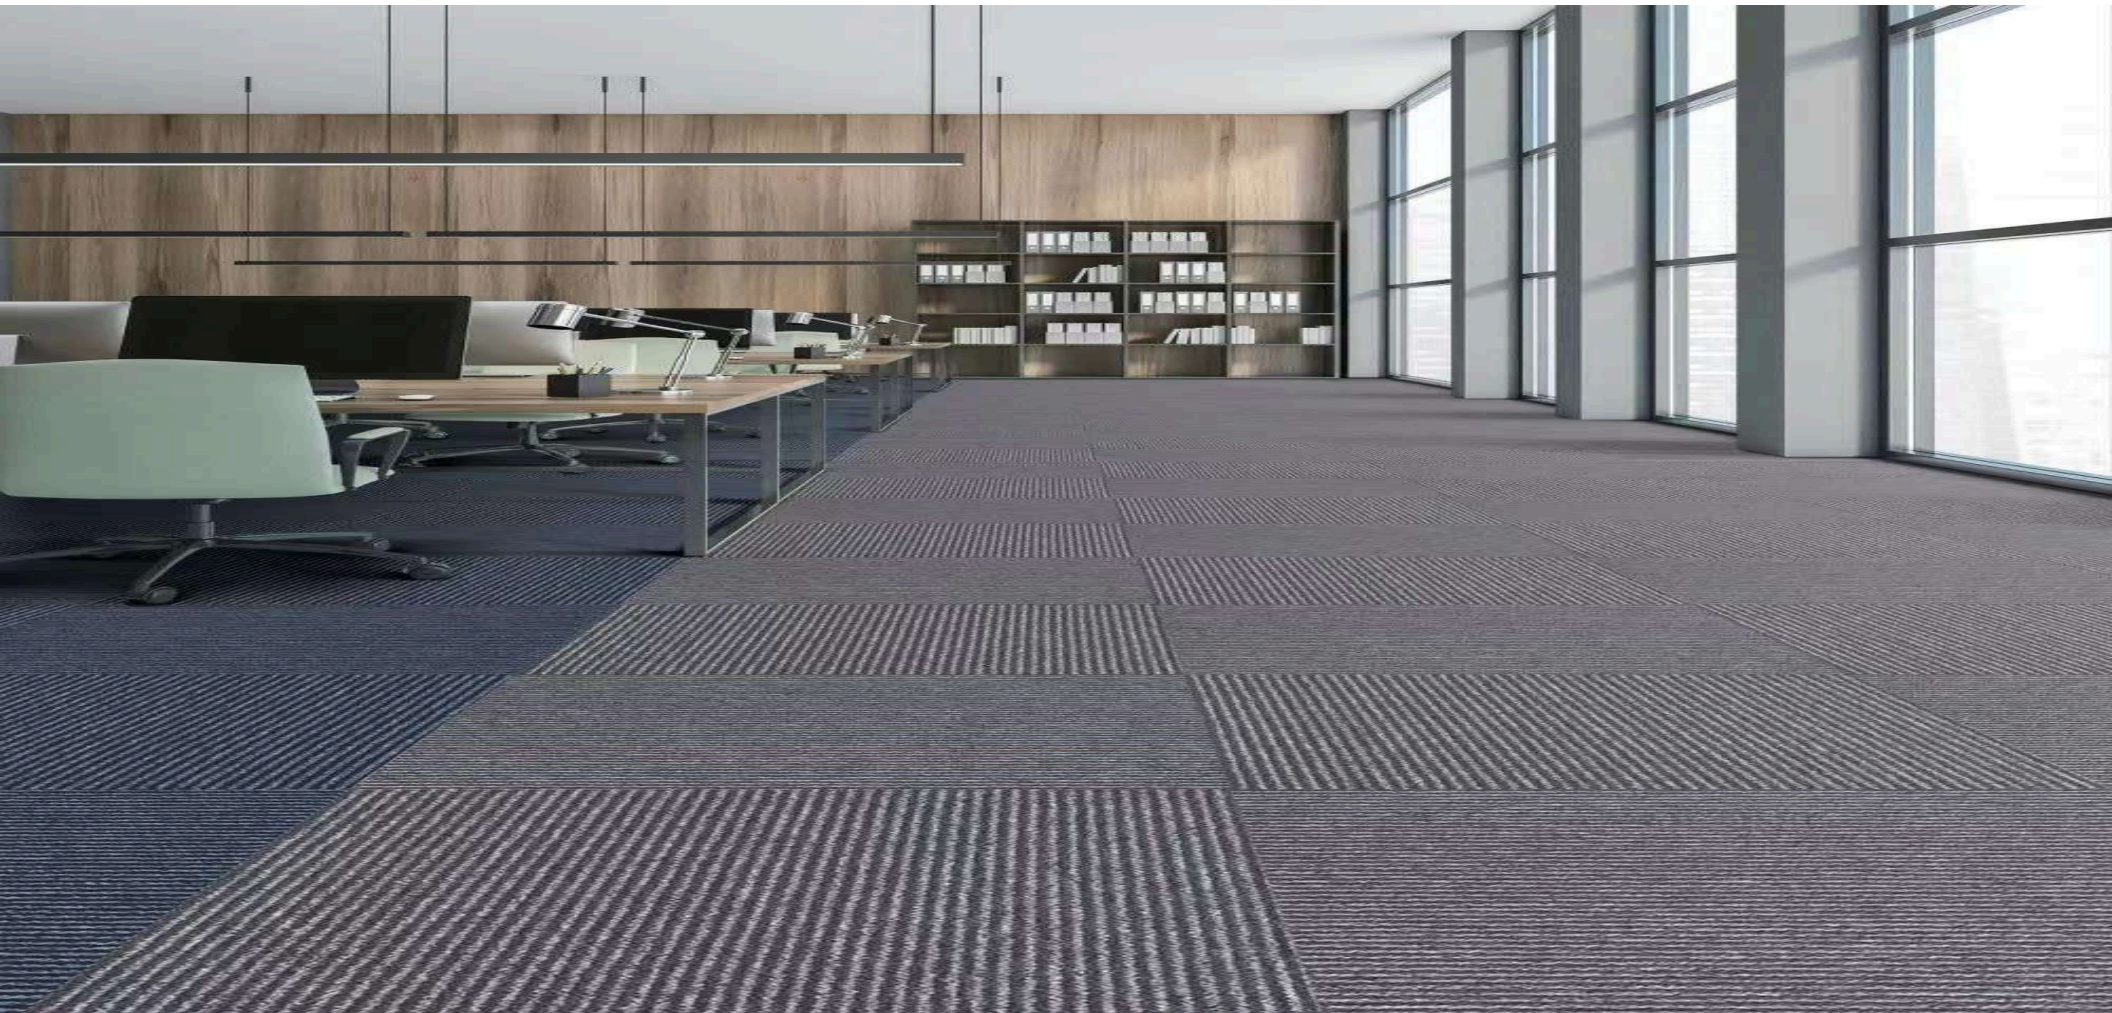

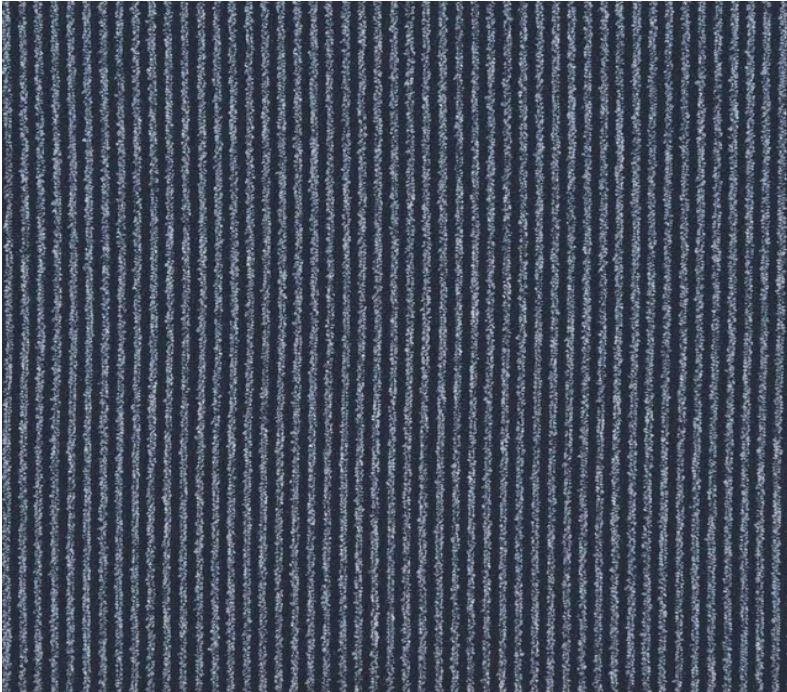

STRAIGHT 24



STRAIGHT 21



Specification Sheet	
	STRAIGHT
Pile fiber material	100% Polypropylene
Construction	Level Loop
Pile Height	3.5mm±0.5mm
Pile yarn weight	550 GSM
Tile Size	50cmx50cm
Backing type	Bitumen
Area per box	6sqm/carton
No.of Tiles per box	24pcs/carton
Dye method	Solution Dyed
Tufting Gauge	1/10"
Total Weight	3500g/sqm±5%
Total Thickness	5.5±0.3mm
Recommended installation	Brick,Quarter Turn,Monolithic
Location usage	Moderate Traffic
Electro static properties	AATTCC 134 Anti-static
Antistatic	Propensity<3 kv
Flame Properties	ASTM E648 Radiant Panel
Flame resistant	ASTM E662 Smoke Density